

UTP Cat. 6A Tool-less Keystone Jacks

A revolutionary and innovative technology designed to shorten installation time offering new high performance copper connectivity for 10Gbits/s Ethernet.

Specifications:


- Qualified Cat. 6A
- Permanent Link/Channel of TIA/EIA-568-B-2-10 Cat. 6A
- ISO/IEC 11801 2nd edition, Amendment 1.1
- Cenelec EN 50173-X 2nd edition
- IEC 61935-1 edition 3



BT-U6AKJ

Electrical:

- Current rating: 1.5 Amps
- Insulation Resistance: 500 Mohms Minimum
- Contact Resistance: 20 Mohms Maximum
- DC Resistance: 0.1 ohms Maximum

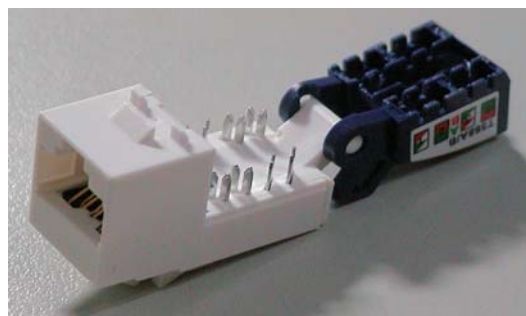

Mechanical:

- Plug Insertion Life: 750 Cycles Minimum
- Plug and Jack Contact Force: 100 Grams Minimum
- Plug Retention Force: 30 lbs Minimum
- Cenelec EN 50173-X 2nd edition
- Temperature: -40°F to 150°F (-40°C to 68°C)



Physical Characteristics:

- Housing: PC, UL 94V-0
- PCB Module
 - Insertion: PBT UL94V-0
 - Contact: 0.46mm phosphor bronze 30μ" gold over nickel plating
 - IDC holder: PC, UL 94V-0
 - PBC: FR4
- Cap: PC, UL 94V-0
- Shutter: PC, UL 94V-0

Bencent Tzeng Industry Co., Ltd.

3rd fl., No. 3 Ruey Kuang Rd., Nei Hu District, Taipei 114, Taiwan.

Tel: 886-2-27913892

Fax: 886-2-27916069